

MODEL LWPU TEAR TAPE UNWIND & APPLICATORS

The powered level unwind is designed to unwind of pressure sensitive tear strip tapes for application to overnight envelopes or corrugated products when used with the Model T-626 or T-627 applicators. The tape applicator can be mounted over a moving product or conveyor or used on custom designed taping equipment.

OPTIONS

- Controls systems to start and stop the application of the tape
- Tape low or tape out sensors
- 220v AC, 50/60 Hz

TAPE SPECIFICATIONS


- Tape Roll Diameter: 15" OD x 6" high – 6" ID x 7" long core, larger units available
- Level Wound Roll: $\frac{1}{8}$ " – $\frac{1}{4}$ " wide level wound roll
- Optional $\frac{1}{4}$ " – 1" wide
- Application Speeds: Up to 350' per minute

Note: The tape cut-off creates a serrated cut-off for the tape. The tape gripper will leave some marks on the adhesive side of the tape approximately $\frac{1}{2}$ " (13mm) from the leading end of the tape.

The powered unwind can be used the the model T-627 or T-626 applicator. The T-626 is shown at right. Both are available in either RH or LH.



LWPU

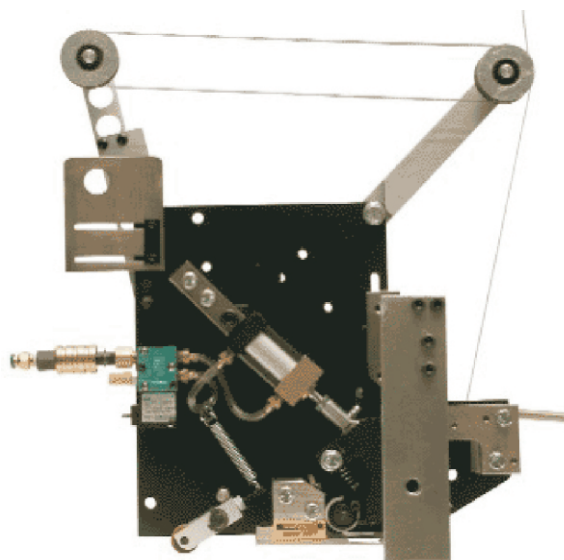

T-626

See Straub for engineered tape solutions in a variety of industries, from automotive and packaging to solar. If we don't have the tape applicator you need, we'll design, build and install a custom solution for you.