


MODEL SD-625-TL PRINTED TAPE LABEL PAD APPLICATOR

The SD-625 TL Printed Tape Label Pad Applicator is an economical method to automatically feed, cut and apply pressure sensitive labels. It can be used as a manual machine, as shown, or mounted on an automatic machine without the base plate and pedestal.

Liner and die cutting of label is not required.

MACHINE SPECIFICATIONS

- Machine cycle time: Up to 75' per minute
- Tape Placement Accuracy: + 1/16"
- Tape Length Tolerance: + 1/16" depending upon the length and type of label
- Pad Travel: Pad travels to 1/2" below the bottom of the side plate
- Shipping Weight: 175 lbs.
- Size: 28 1/2" long x 16" wide x 29" high

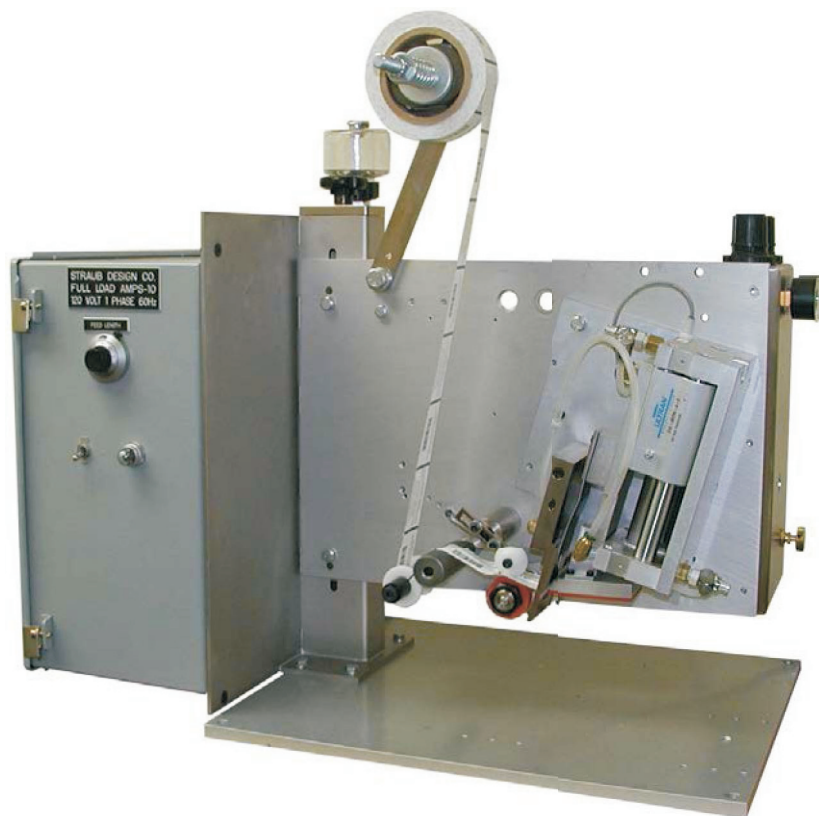

PRODUCT SPECIFICATIONS

- Label Widths: 1/4" – 2"
- Label Lengths for tape application: 1/2" – 3"
- Label Roll Diameter: 18"
- Core Diameter: 3"

Shown with optional base plate & pedestal

POWER SPECIFICATIONS

- Electrical: 115VAC, 60Hz, 2A
- Air: 80 PSI, 1.4 SCFM

See Straub for engineered tape solutions in a variety of industries, from automotive and packaging to solar. If we don't have the tape applicator you need, we'll design, build and install a custom solution for you.